



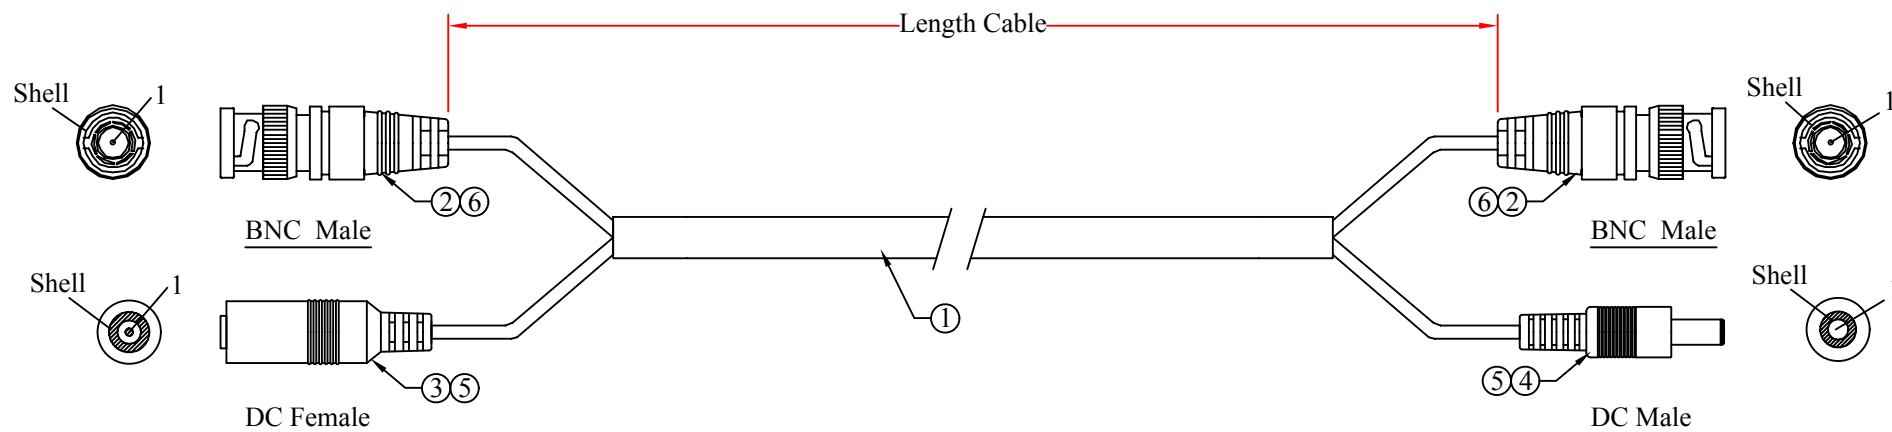


REV.	DESCRIPTION	DATE
A		08-2013



Cable Specifications	Pin Assignment								
28AWG 10/0.10mm Stranded Bare Copper Conductor 28/0.10mm, Stranded, Braided Cover 1.0mm (2C Red /Black) Insulation 2.0mm OD White PVC Inner Jacket 	<table> <tr> <td><u>BNC Male</u></td><td><u>BNC Male</u></td></tr> <tr> <td>Shell 1</td><td>Shell 1</td></tr> <tr> <td><u>DC Female</u></td><td><u>DC Male</u></td></tr> <tr> <td>Shell 1</td><td>Shell 1</td></tr> </table>	<u>BNC Male</u>	<u>BNC Male</u>	Shell 1	Shell 1	<u>DC Female</u>	<u>DC Male</u>	Shell 1	Shell 1
<u>BNC Male</u>	<u>BNC Male</u>								
Shell 1	Shell 1								
<u>DC Female</u>	<u>DC Male</u>								
Shell 1	Shell 1								

RoHs

PART NO.	CABLE LENGTH
10B1-02125	25FT
10B1-02150	50FT
10B1-02175	75FT
10B1-021HD	100FT

(White PVC)				ITEM NUMBER	10B1-021xx		DRAWER	JL
6	Molded PVC Yellow			TITLE	BNC Video Cable with DC Power Cable BNC Male, Male to Female Power		CHECKED	
5	Molded PVC Black						APPROVED	
4	DC Male, Insulation Black, Shell Nickel Plated							
3	DC Female, Shell Nickel Plated			MATERIAL		SCALE		 
2	BNC Male, Shell Nickel Plated			REV.	A	UNIT	INCH	
1	(10/0.10BC+28/0.10)*2C,PVC Jacket White			DRAWING NO:				
NO.	SPECIFICATIONS			NO.(ID)				
BOM LIST								